




<b>Product:</b>	<b>Kleen-Fit Guard DC022</b>	<b>Grid Material:</b>	Aluminium – Minimum 95% recycled content in clo
<b>Category:</b>	Fitted Entrance System	<b>Grid Recycled Content:</b>	95% recycled content
<b>Sub-Category:</b>	Grid System	<b>Anodised Grid Lengths</b>	
<b>Typical Applications:</b>	High traffic areas such as residential and care homes, medical practice, offices and administrative buildings, family homes, hotels, retail, sectors, shopping centres, schools, hospitals and airports	Black:	Max. 4000mm
<b>Max Module Length:</b>	4000mm Panels are manufactured specifically to customer requirements. Panel lengths available up to 4000mm left to right as required (Anodised panel lengths vary – see below)	Light Gold:	Max. 2600mm
<b>Installation Method</b>	Recessed in matwell or surface-laid with ramp frame	Medium Gold:	Max. 2600mm
<b>Insert Material:</b>	Heavy ribbed 100% polypropylene	Dark Gold:	Max. 2600mm
<b>Insert Depth:</b>	12mm 17mm	Gun Metal Grey:	Max. 2500mm
<b>Origin</b>	Made In Europe	Light Bronze:	Max. 1600mm
		Medium Bronze:	Max. 4000mm
		Dark Bronze:	Max. 4000mm
		<b>Fire Rating:</b>	Hot Metal Nut BS4790:1987 (1996) EN 95/28 (ECE 118)
		<b>Light Fastness:</b>	ISO 105-B02:2014 - 6
		<b>Rubbing Fastness:</b>	ISO 105-E01 - 5
		<b>Water Fastness:</b>	ISO 105- x12 - 4
		<b>ISO9001:2018:</b>	Yes
		<b>BS8300 DDA Compliant:</b>	Yes
		<b>BS4790:1987:</b>	Yes

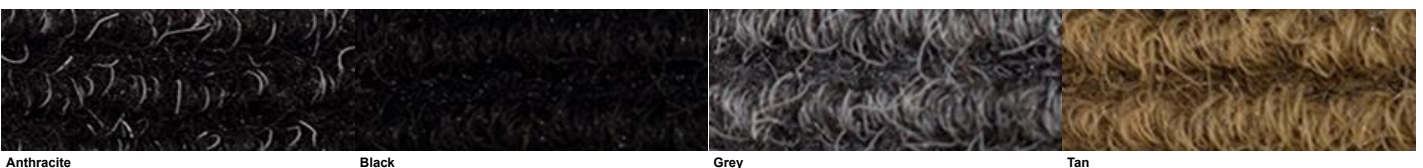

Anthracite

Black

Grey

Tan